


06.29.00

A

06/28/00



JC930 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No. 5576-128
	First Inventor or Application Identifier: Shima et al.
	Title of Invention: METHOD FOR REDUCING PULP TO POWDER AND PROCESS FOR THE PRODUCTION OF A CELLULOSE ETHER
	Express Mail Label No. EL432824367US

JC951 U.S. PTO

158509/60



06/28/00

ADDRESS TO: ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
WASHINGTON, DC 20231

Transmitted herewith for filing in the United States Patent Office is a patent application for:

Inventors: Yukio Shima; Mitsuo Narita; Atsushi Hatayama

1. ☒ The Filing Fee has been calculated as shown below:

	No. Filed	No. Extra	Small Entity Rate	Fee 0	Large Entity Rate	Fee 1
BASIC FEE				\$0		\$690
TOTAL CLAIMS:	6 - 20 =	0	X 9 =	\$0	x 18 =	\$0
INDEP CLAIMS:	1 - 3 =	0	X 39 =	\$0	x 78 =	\$0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED				+130 = \$		+260 = \$
*If the difference in Column 1 is less than zero, enter "0" in Column 2.			TOTAL \$		TOTAL \$	690

The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 16-0605.

- a. ☒ Fees required under 37 CFR 1.16 (National filing fees).
b. ☒ Fees required under 37 CFR 1.17 (National application processing fees).
☒ A check in the amount of \$ 690.00 for the filing fee is enclosed.
☐ The above filing fee will be paid along with Applicant(s) Response to the Notice to File Missing Parts.
2. ☒ Specification; Total Pages 14
3. ☒ 1 Sheets of Formal Drawing(s) (35 USC 113)

06/28/00 06:05:31

4. ☒ Declaration and Power of Attorney; [Total Pages 3]
 a. ☒ Newly executed (original or copy)
 b. ☐ Copy from a prior application (37 CFR 1.63(d))
 (for continuation/divisional with Box 16 completed)
 i. ☐ DELETION OF INVENTOR(S) Signed statement
 attached deleting inventor(s) named in the prior
 application, see 37 CFR 1.63(d)(2) & 1.33(b).
5. ☐ Microfiche Computer Program (Appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 a. ☐ Computer Readable Copy
 b. ☐ Paper Copy (identical to computer copy)
 c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s) (including a check for the \$40.00 fee)
8. ☐ 37 CFR 3.73(b) Statement (when there is an assignee); ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449; ___ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
13. ☐ Small Entity Statement(s)
 ☐ Statement filed in prior application; status still proper and desired.
14. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
 Foreign Priority is Japan Patent App. No. 182947/1999 filed 6/29/99
15. ☐ Other: ___
16. **If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:**

☐ Continuation ☐ Divisional ☐ Continuation in Part (CIP)
 of prior Application No: ___; Filed ___

Prior Application Information: Examiner

Group/Art Unit:

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. **CORRESPONDENCE ADDRESS**

Customer Number or Bar Code Label **000826**

Attention Of: Melissa B. Pendleton

Signature:



Attorney/Agent of Record: Melissa B. Pendleton

Attorney/Agent Registration No. 35,459,

Tel Charlotte Office (704) 331-6000

Fax Charlotte Office (704) 334-2014

ALSTON & BIRD LLP

P.O. Drawer 34009


Charlotte NC 28234-4009

#4432022v1

"Express Mail" mailing label number EL432824367US

Date of Deposit June 28, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner For Patents, Washington, DC 20231.



Joyce D. Smith

000826-0000

TITLE OF THE INVENTION

Method for Reducing Pulp to Powder and Process for
the Production of a Cellulose Ether

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This invention relates to a method for reducing pulp to
powder and thereby producing powder pulp for use, for
example, in the production of cellulose ethers. Moreover,
this invention also relates to a process for the production
10 of a cellulose ether.

2. Description of the Related Art

In the production of cellulose ethers, highly purified
cotton linter pulp and wood pulp are ground by means of a
grinder such as a knife mill, and the resulting powdered
15 pulps are used as starting materials.

As methods for grinding pulp finely, there have been
proposed a method in which dried pulp is ground at low
temperatures as described, for example, in Japanese Patent
Provisional Publication No. 59-75901 and Japanese Patent
20 Publication No. 64-7828; and a method in which compressed
pulp is ground by means of a jet mill as described, for
example, in Japanese Patent Publication No. 3-48010.

However, these methods are not satisfactory from an
industrial point of view, because they involve a troublesome
25 step (e.g., drying or compression) prior to grinding and are

hence unsuitable for the treatment of large amounts of pulp, and because they require an apparatus for keeping the grinder at a low temperature and a refrigerant therefor.

In order to overcome these disadvantages, grinding in a knife mill is widely employed at present.

Usually, powdered cellulose ethers are used by dissolving them in a solvent such as water. The undissolved fiber content in an aqueous solution of a cellulose ether is considered to be dependent on the degree of uniformity to which an alkali permeates into powdered pulp during the preparation of an alkali cellulose. The undissolved fiber content in an aqueous solution of a cellulose ether may pose a problem during its use. Consequently, in order to reduce the undissolved fiber content, it is essential to cause an alkali to permeate uniformly into pulp and thereby prepare an alkali cellulose having a uniform alkali concentration.

Moreover, the permeation of an alkali into powdered pulp is considered to be affected by the particle shape of the powdered pulp. Grinding in a knife mill utilizing chiefly shearing force yields powdered pulp comprising long fibers when observed microscopically. Since a fibrous powder has a small surface area per particle, this limits the chance of contact between the pulp and the alkali, and acts adversely on the permeation of the alkali into the particles. Consequently, it is thought that the alkali fails to permeate

uniformly into the powdered pulp and the degree of alkali permeation thereinto is limited.

Furthermore, in a fibrous powder, the fibers are intertwined with one another to give a large void volume and hence a low bulk density. Since the amount of pulp which can be used at a time in the production of a cellulose ether is limited, fibrous powdered pulp having a low bulk density is disadvantageous from the viewpoint of production. Accordingly, it is desired to develop a method for producing powdered pulp having as high a bulk density as possible on an industrial scale.

SUMMARY OF THE INVENTION

The present invention has been made in view of the above-described circumstances, and an object thereof is to reduce the undissolved fiber content in aqueous solutions of cellulose ethers and, at the same time, produce cellulose ethers stably by improving the productivity thereof.

The present inventors paid their attention to the fact that, since the shape of powdered pulp particles is greatly affected by the principle of grinding, the use of a pulp grinder based on a principle different from that of a knife mill utilizing shearing force can change particle shape and thereby improve the permeation of an alkali.

Accordingly, the present inventors made intensive investigations with a view to solving the above-described

problems, and have now invented a method for reducing pulp to powder which comprises grinding pulp by means of a vertical roller mill to produce powdered pulp.

In the above-described grinding method of the present invention, the average particle diameter of the powdered pulp is preferably adjusted to 20-300 μm .

Moreover, in the present invention, the powdered pulp obtained according to the above-described method is used as a starting material for the production of cellulose ethers.

In the grinding method of the present invention, pulp is ground by means of a vertical roller mill to produce powdered pulp which has a shape different from the elongated fibrous form of the powdered pulp obtained by grinding in a knife mill or the like, and is hence suitable for use as a starting material for the production of cellulose ethers. Thus, the undissolved fiber content in aqueous solutions of cellulose ethers can be reduced and, at the same time, cellulose ethers can be stably produced by improving the productivity thereof.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a perspective view of a vertical roller mill which can be used in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

An exemplary vertical roller mill which can be used in the present invention is more specifically explained below with reference to FIG. 1.

FIG. 1 is a perspective view of a vertical roller mill suitable for carrying out the method for reducing pulp to powder in accordance with the present invention. A turntable 2 is disposed in the lower part of a housing 1 and connected to a shaft 3. Shaft 3 is connected to a motor (not shown) on the outside of housing 1 so as to rotate turntable 2. Turntable 2 has a groove 4 along its outer periphery, and rollers 5 are disposed above groove 4. Rollers 5 are supported by arms 6, which are connected to cylinders (not shown) so as to press down rollers 5 into groove 4.

In the upper part of housing 1, a separator 7 for separating sufficiently ground and finely powdered pulp from coarsely ground pulp is installed. Separator 7 has a shaft 8, which is connected to a motor 9 on the outside of housing 1 so as to rotate separator 7.

Moreover, a raw material inlet 11 for feeding raw pulp and a product outlet 15 for discharging the resulting powdered pulp are provided in the upper part of housing 1, and an air inlet 20 for feeding air into housing 1 is provided in the lower part of housing 1.

By using this vertical roller mill 10, raw pulp can be reduced to powder in the following manner. When raw pulp is thrown into housing 1 through raw material inlet 11, it falls onto turntable 2 and is accumulated in groove 4 under the action of the centrifugal force exerted by turntable 2. The

accumulated raw pulp is compressed and ground between rollers 5 and groove 4, and thereby reduced to powder. In the interior of housing 1, the air fed through air inlet 20 produces a whirling upward current of air, so that the resulting powdered pulp is carried by the whirling upward current of air and lifted to the upper part of housing 1. During this process, insufficiently ground and coarsely powdered pulp is also lifted to the upper part of housing 1, but sufficiently ground and finely powdered pulp alone can pass through the slits of separator 7. The powdered pulp so classified, together with the current of air, is discharged from product outlet 15 to the outside of housing 1. The powdered pulp so discharged is collected in a bag filter.

The grinding principle of a roller mill involves compression, shearing and grinding. When observed microscopically, the resulting powdered pulp comprises shorter fibers as compared with the powdered pulp obtained by grinding in a knife mill, and particles obtained by grinding or compression. This causes a reduction in void volume. Consequently, while grinding in a knife mill yields powdered pulp having an apparent density (loose) of 0.05 to 0.13 g/cm³, grinding in a roller mill yields powdered pulp having a bulk density of as high as 0.14 to 0.30 g/cm³. Accordingly, when a reaction vessel having a fixed internal volume is used, a greater amount of powdered pulp may be used

at a time for the purpose of producing a cellulose ether.

As the raw pulp, there may be used cotton linter pulp and wood pulp which are commonly used for the production of cellulose ethers. However, it is to be understood that the present invention is not limited thereto. The raw pulp may have any suitable size and shape. For example, the raw pulp may be in the form of square chips having a size of about 1 to 2 cm, but the present invention is not limited thereto.

The aforesaid powdered pulp has an average particle diameter of 20 to 300 μm and preferably 60 to 200 μm . If the average particle diameter is less than 20 μm , not only the use of such powdered pulp will be inefficient from an industrial point of view, but also the powdered pulp show a significant reduction in the degree of polymerization and hence exert an influence on the viscosity of an aqueous solution of the resulting cellulose ether. If it is greater than 300 μm , this will adversely affect fluidity in the reactor and alkali absorption during the production of a cellulose ether, thus contributing to an increase in undissolved fiber content.

By using the powdered pulp thus obtained, it is possible to form an alkali cellulose into which an alkali has permeated more uniformly, and thereby reduce the undissolved fiber content in an aqueous solution of the resulting cellulose ether.

Cellulose ethers may be produced in the well-known manner, for example, by adding an alkali (e.g., sodium hydroxide or potassium hydroxide) to raw pulp so as to form an alkali cellulose, and then adding thereto an etherifying agent such as methyl chloride, propylene oxide or ethylene oxide.

The method for reducing pulp to powder in accordance with the present invention makes it possible to produce industrially advantageous powdered pulp having high bulk density, with high productivity and good stability. Moreover, when a cellulose ether is produced by using this powdered pulp as a starting material, it is possible to reduce the undissolved fiber content in an aqueous solution of the cellulose ether.

The present invention is further illustrated by the following examples and comparative examples. These examples are not to be construed to limit the scope of the invention.
Example 1 and Comparative Example 1

Using an IHI vertical pulverization mill (IS Mill, manufactured by Ishikawajima Harima Heavy Industries Co., Ltd.) as a vertical roller mill, raw pulp was thrown thereinto and ground. The raw pulp was in the form of square chips having a size of about 1 to 2 cm, but no particular limitation is placed on the form of the raw pulp. After grinding, the powdered pulp was collected in a bag filter.

003290" 57250960

The powdered pulp thus obtained was used as a starting material for the production of hydroxypropyl methylcellulose.

The process employed in the example for producing the cellulose ether was as follows: Sodium hydroxide was added to the powdered pulp so as to form an alkali cellulose. Then, methyl chloride for replacement with methoxyl and propylene oxide for replacement with hydroxypropoxyl were added thereto and reacted therewith. The resulting hydroxypropyl methylcellulose was purified until its residual salt content was reduced to about 1% by weight, and then dried until its moisture content reached 1.2% by weight.

The dried hydroxypropyl methylcellulose was pulverized in a batch type vibration mill (B-3, manufactured by Chuo Kakoki Co., Ltd.) for 2 hours. The resulting powdered hydroxypropyl methylcellulose was formed into an aqueous solution having a concentration of 2% by weight and used to measure its light transmittance.

For purposes of comparison, pulp was ground by means of a mesh mill (HA-2542, manufactured by Hourai Tekkosho, Ltd.). For both grinders, each of cotton linter pulp and wood pulp was used as the raw pulp. The average particle diameter and bulk density of each powdered pulp and the light transmittance of an aqueous solution of each powdered hydroxypropyl methylcellulose (abbreviated as "HPMC" in Table 1) are shown in Table 1.

Bulk density was measured in the following manner, using a Model PT-E Hosokawa Powder Tester (manufactured by Hosokawa Micron Corporation.).

After the Hosokawa Powder Tester was set in the mode for the measurement of apparent specific gravity (loose), an appropriate amount (about 40 g) of a sample was gently placed on the sieve with a special-purpose scoop, and the indicator of the rheostat was set (at 2.5) so as to give a flow rate at which the cup (100 cm³) was filled with the falling sample to overflowing in 20-30 seconds. After any excess sample was scraped off from the cup with a vertically standing blade, and any sample powder attached to the cup was swept off with a brush, the cup filled with the sample was weighed to a precision of 0.1 g with an even balance. Then, the apparent specific gravity of the sample was calculated according to the following equation.

$$\text{Apparent specific gravity (loose)} = \frac{A - B}{100}$$

wherein A is the combined weight (g) of the sample and the cup, and B is the tare weight (g) of the cup.

Light transmittance was measured with visible light, using a Model PC-50 Photoelectric Colorimeter having a cell thickness of 20 mm.

Example 2 and Comparative Example 2

The same procedure as described above was carried out,

except that, in place of the cotton linter pulp, wood pulp was used as the raw pulp.

Table 1

	Properties of powdered pulp			Properties of powdered HPMC
	Raw pulp	Average particle diameter (μm)	Bulk density (g/cm^3)	Light transmittance
Example 1	Cotton linter pulp	93	0.139	92.7
Example 2	Wood pulp	68	0.196	96.6
Comparative Example 1	Cotton linter pulp	225	0.098	89.4
Comparative Example 2	Wood pulp	115	0.127	91.7

As shown in Table 1, the powdered pulps obtained by grinding in a vertical roller mill had a smaller average particle diameter and a higher bulk density than those obtained by grinding in a knife mill. Moreover, the hydroxypropyl methylcellulose produced by using the pulp ground in a roller mill gave an aqueous solution having a higher light transmittance.

Accordingly, it may be said that powdered pulp having an appropriate average particle diameter and hence a higher bulk density than conventional can be obtained by grinding pulp according to the method of the present invention and this

powdered pulp is suitable for the production of cellulose
ethers.

CLAIMS:

1. A method for reducing pulp to powder which comprises grinding pulp by means of a vertical roller mill to produce powdered pulp.

2. A method for reducing pulp to powder as claimed in claim 1 wherein the powdered pulp has an average particle diameter of 20 to 300 μm .

3. A method for reducing pulp to powder as claimed in claim 1 wherein the powdered pulp has an average particle diameter of 60 to 200 μm .

4. A process for the production of a cellulose ether wherein the powdered pulp obtained by a method as claimed in claim 1 is used as a starting material.

5. A process for the production of a cellulose ether wherein the powdered pulp obtained by a method as claimed in claim 2 is used as a starting material.


6. A process for the production of a cellulose ether wherein the powdered pulp obtained by a method as claimed in claim 3 is used as a starting material.

ABSTRACT OF THE DISCLOSURE

Pulp is ground by means of a vertical roller mill. The average particle diameter of the resulting powdered pulp is adjusted to 20-300 μm . The powdered pulp thus obtained is used as a starting material for the production of cellulose ethers.

008290" 57850120

FIG.1

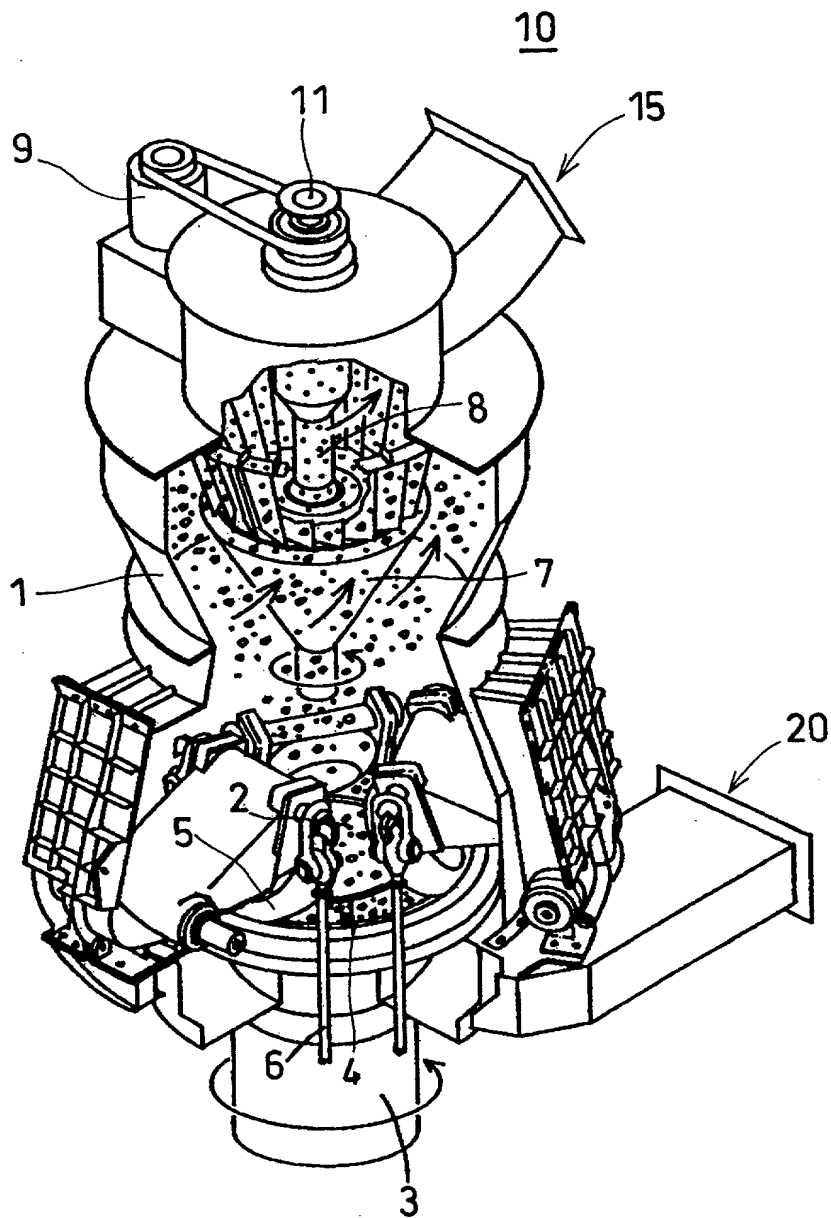

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket No. _____

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"Method for Reducing Pulp to Powder and Process
for the Production of a Cellulose Ether"

the specification of which

[X] is attached hereto

OR

[] was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application on which priority is claimed.

182947/1999	JAPAN	06/29/1999	[X] Yes [] No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			[] Yes [] No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			[] Yes [] No
Number	Country	MM/DD/YYYY Filed	Priority Claimed

003290" ST350960

ENGLISH LANGUAGE DECLARATION CONTINUED

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
Application Number(s)	Filing Date (MM/DD/YYYY)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application (37 C.F.R. § 1.63(d)).

Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

091505815 062800

ENGLISH LANGUAGE DECLARATION CONTINUED

POWER OF ATTORNEY: As a named inventor, I hereby appoint the practitioners associated with the Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

Customer Number 826

Direct correspondence to the
attention of and telephone calls to:

Stephen M. Bodenheimer, Jr.
Registration No. 28,932
Tel (704) 331-6000
Fax (704) 334-2014

Full name of (first/sole) inventor: Yukio SHIMA

Inventor's

Signature: Yukio Shima Date: June 7, 2000

Residence: Naka Kubiki-gun, Niigata-ken, Japan

Citizenship: Japan

Post Office Address: c/o Specialty Chemicals Research Center,
SHIN-ETSU CHEMICAL CO., LTD.,
28-1, Nishi-Fukushima, Kubiki-mura,
Naka Kubiki-gun, Niigata-ken, Japan

Full name of second inventor: Mitsuo NARITA

Inventor's

Signature: Mitsuo Narita Date: June 7, 2000

Residence: Naka Kubiki-gun, Niigata-ken, Japan

Citizenship: Japan

Post Office Address: c/o Specialty Chemicals Research Center,
SHIN-ETSU CHEMICAL CO., LTD.,
28-1, Nishi-Fukushima, Kubiki-mura,
Naka Kubiki-gun, Niigata-ken, Japan

Full name of third inventor: Atsushi HATAYAMA

Inventor's

Signature: Atsushi Hatayama Date: June 7, 2000

Residence: Naka Kubiki-gun, Niigata-ken, Japan

Citizenship: Japan

Post Office Address: c/o Specialty Chemicals Research Center,
SHIN-ETSU CHEMICAL CO., LTD.,
28-1, Nishi-Fukushima, Kubiki-mura,
Naka Kubiki-gun, Niigata-ken, Japan

008290"ST80960